

EXTERNAL LINKS

HD67235-A1

BOX SHEET

DeviceNet Slave / CAN - Coverter

Box Sheet for Order code: HD67235-A1
Document code: BS67235-A1
V2.001



ADFweb.com srl

Strada Nuova, 17, IT-31010 Marenco di Piave, Treviso - Italy

www.ADFweb.com

QR of Manual

[www.adfweb.com/download/
filefold/MN67235_ENG.pdf](http://www.adfweb.com/download/filefold/MN67235_ENG.pdf)

QR of Box-Sheet

[www.adfweb.com/download/
filefold/BS67235-A1_ENG.pdf](http://www.adfweb.com/download/filefold/BS67235-A1_ENG.pdf)

QR of Software

[www.adfweb.com/download/
filefold/SW67235.zip](http://www.adfweb.com/download/filefold/SW67235.zip)

HD67235-A1


CONNECTION SCHEME

Order code: HD67235-A1

Dip-Switch A:
-Dip1 – Must be at ON
-Dip2 – Functioning Mode
 = Normal  = Boot


Dip-Switch B:
-Dip1 – DeviceNet Termination Resistor
 = Open  = 120 Ohm

Connector3:
DeviceNet port (Isolated port)
Hi = High wire
Shl = Shield* (to Isolated Ground)
Lo = Low wire

Dip-Switch B:
-Dip1 – CAN Termination Resistor
 = Open  = 120 Ohm

Connector2:
CAN port (Isolated port)
Hi = High wire
Shl = Shield* (to Isolated Ground)
Lo = Low wire

Connector1:
Power Supply port
0V = Ground
+V = Positive wire
V AC: min 8V ; max 24V
V DC: min 12V ; max 35V

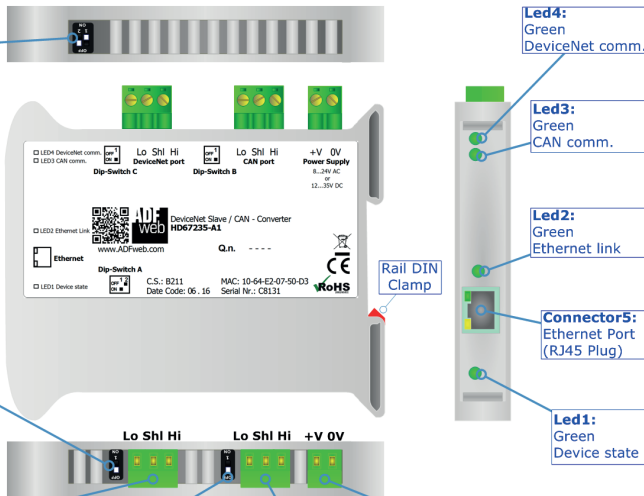

Order code: HD67235-A1