

EXTERNAL LINKS

HD67235-A4



QR of Manual

[www.adfweb.com/download/
filefold/MN67235_ENG.pdf](http://www.adfweb.com/download/filefold/MN67235_ENG.pdf)



QR of Box-Sheet

[www.adfweb.com/download/
filefold/BS67235-A3_ENG.pdf](http://www.adfweb.com/download/filefold/BS67235-A3_ENG.pdf)



QR of Software

[www.adfweb.com/download/
filefold/SW67235.zip](http://www.adfweb.com/download/filefold/SW67235.zip)

HD67235-A4

BOX SHEET

DeviceNet Slave / CAN - Coverter

Box Sheet for Order code: HD67235-A4
Document code: BS67235-A4
V1.001



ADFweb.com srl
Strada Nuova, 17, IT-31010 Mareno di Piave, Treviso - Italy

www.ADFweb.com



CONNECTION SCHEME

Order code: HD67235-A4

Dip-Switch A:
 -Dip1 – Must be at ON
 -Dip2 – Functioning Mode

 = Normal  = Boot

Dip-Switch B:
 -Dip1 – DeviceNet Termination Resistor

 = Open  = 120 Ohm

Connector3:
 DeviceNet port (Isolated port)

Hi Shl Lo

Hi = High wire
 Shl = Shield* (to Isolated Ground)
 Lo = Low wire

Dip-Switch B:
 -Dip1 – CAN Termination Resistor



 = Open  = 120 Ohm

Connector2:
 CAN port (Isolated port)


Hi Shl Lo

Hi = High wire
 Shl = Shield* (to Isolated Ground)
 Lo = Low wire

Connector1:
 Power Supply port

0V = Ground  ←0V
 +V = Positive wire  ←+V

V AC: min 8V ; max 24V
 V DC: min 12V ; max 35V

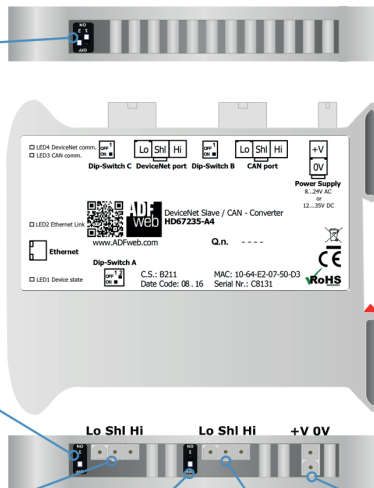

Rail DIN Clamp

Led4:
 Green
 DeviceNet comm.

Led3:
 Green
 CAN comm.

Led2:
 Green
 Ethernet link

Connector5:
 Ethernet Port
 (RJ45 Plug)

Led1:
 Green
 Device state

Order code: HD67235-A4