

CAN / PROFIBUS Slave - Converter


To obtain the complete manual please go to

www.adfweb.com/download/filefold/CAN_PROFIBUS_MN67552_ENG.pdf

To obtain the new version of this box sheet please go to

www.adfweb.com/download/filefold/BS67552_ENG.pdf

CONNECTION SCHEME:

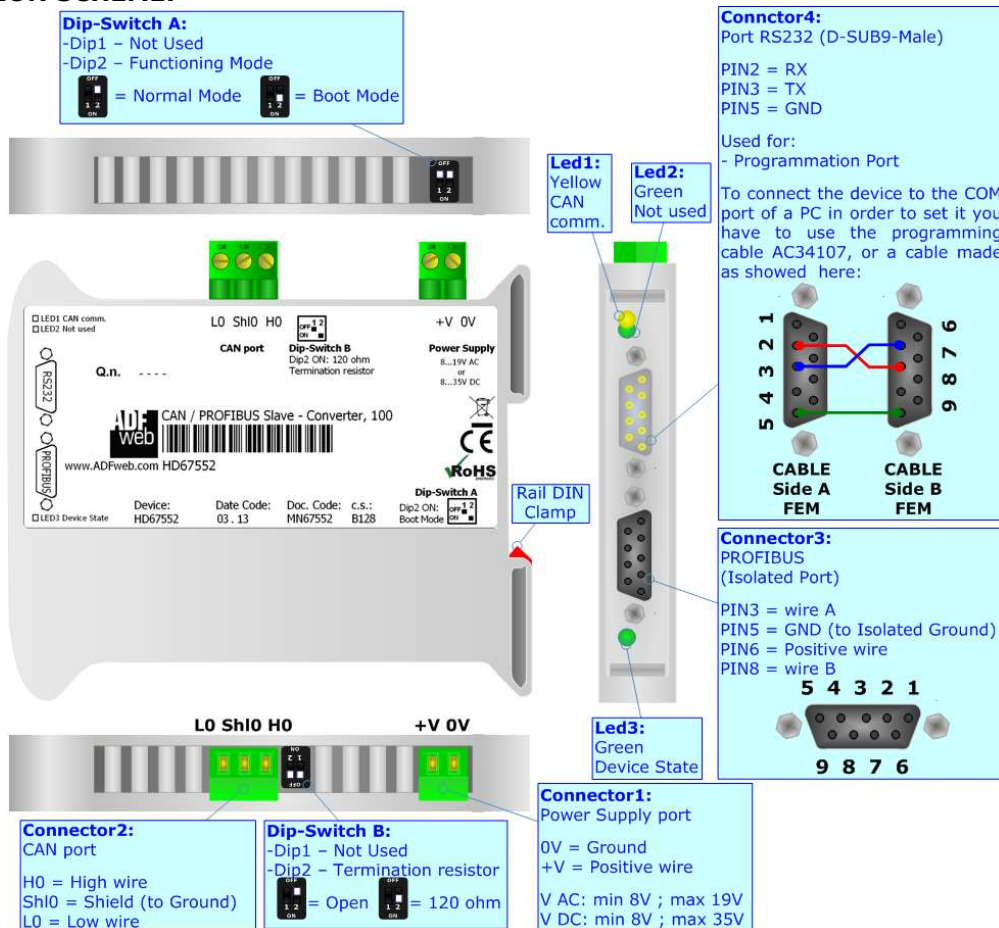

CONFIGURATION SOFTWARE:


For setting up the device you need a the software named SW67552. To obtain this software please go to

www.adfweb.com/download/filefold/SW67552.zip

CHARACTERISTICS OF THE CABLES:

The connection from RS232 socket to a serial port must be made with a NULL MODEM cable (a serial cable where the pins 2 and 3 are crossed).

It is recommended that the RS232C Cable not exceed 15 meters.



ADFweb.com s.r.l.
www.adfweb.com
info@adfweb.com
support@adfweb.com