



QR of Manual

[www.adfweb.com/download/
filefold/MN67604_ENG.pdf](http://www.adfweb.com/download/filefold/MN67604_ENG.pdf)



QR of Box-Sheet

[www.adfweb.com/download/
filefold/BS67604-A1_ENG.pdf](http://www.adfweb.com/download/filefold/BS67604-A1_ENG.pdf)



QR of Software

[www.adfweb.com/download/
filefold/SW67604.zip](http://www.adfweb.com/download/filefold/SW67604.zip)

HD67604-A1

BOX SHEET

PROFINET / PROFIBUS Master Converter

Box Sheet for Order code: HD67604-A1
Document code: BS67604-A1
V1.011



ADFweb.com srl

Strada Nuova, 17, IT-31010 Mareno di Piave, Treviso - Italy

www.ADFweb.com

CONNECTION SCHEME

Order code: HD67604-A1

Dip-Switch A:

- Dip1 – Must be at ON
- Dip2 – Functioning Mode




Connector5:
USB port (not used)

Led1:
Green
ON

Led2:
Yellow
MT

Led3:
Red
BF

Led4:
Red
SF

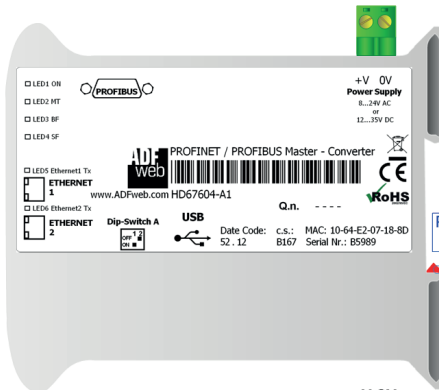

Rail DIN
Clamp

Connector3:
Ethernet1 Port
(RJ45 Plug)

Led6:
Green
Ethernet2 Tx

Connector4:
Ethernet2 Port
(RJ45 Plug)

Connector2:

PROFIBUS port (Isolated port)
(D-SUB9-Female)

- PIN3 = wire A
- PIN5 = Shield** (to Isolated

Ground)

- PIN8 = wire B

5 4 3 2 1



9 8 7 6



Connector1:

Power Supply port

0V = Ground

+V = Positive wire

V AC: min 8V ; max 24V

V DC: min 12V ; max 35V

Order code: HD67604-A1